

SUPER FAST RECTIFIER DIODES


SF21G THRU SF28G 50 to 600 V 2.0 A

FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL 94V-O rate flame retardant
- Lead: Axial leads, solder able per MIL- STD-202, Method 208 guaranteed
- Polarity: Color band denotes cathode end
- High temperature soldering guaranteed:
250°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- Weight: 0.39grams

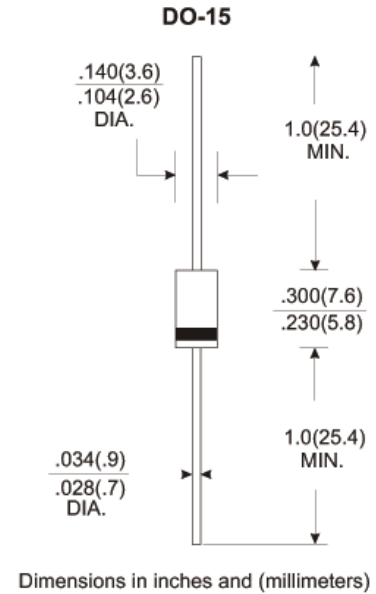

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, Resistive or inductive load. For capacitive load, derate current by 20%

Type Number	Symbols	SF21G	SF22G	SF23G	SF24G	SF25G	SF26G	SF28G	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	Volts	
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	Volts	
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	Volts	
Maximum Average Forward Rectified Current, 375" (9.5mm) Lead Length @ $T_A=55^\circ\text{C}$	$I_{(AV)}$	2.0							Amp	
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50							Amp	
Maximum Forward Voltage @2.0A	V_F	0.95				1.3		1.7	Volts	
Maximum Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	I_R	5.0				100				uAmp
Maximum Reverse Recovery Time (Note 1)	TRR	35							nS	
Typical Junction Capacitance (Note 2)	C_J	60				30				pF
Operating Temperature Range T_J	T_J	-55 to +150							°C	
Storage Temperature Range T_{STG}	T_{STG}	-55 to +150							°C	

NOTES:

1. Reverse Recovery Test Conditions: $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.
3. Thermal Resistance Junction To Ambient

SUPER FAST RECTIFIER DIODES

SF21G THRU SF28G 50 to 600 V 2.0 A

RATINGS AND CHARACTERISTIC CURVES (SF21G THRU SF28G)

FIG. 1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM


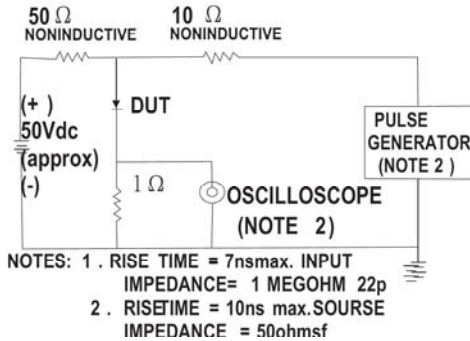


FIG. 2 - MAXIMUM AVERAGE FORWARD CURRENT DERATING

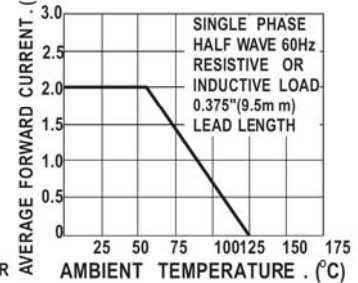


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

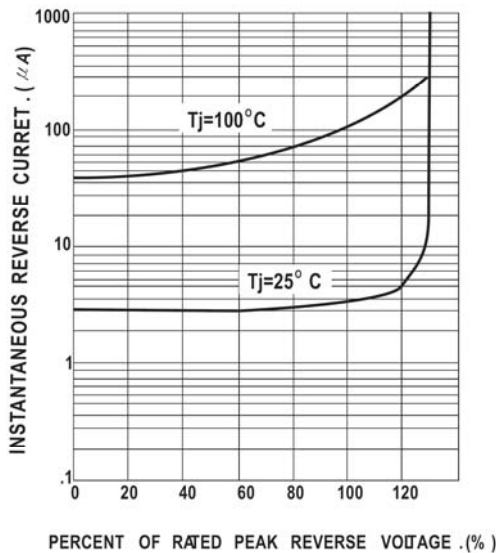


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS

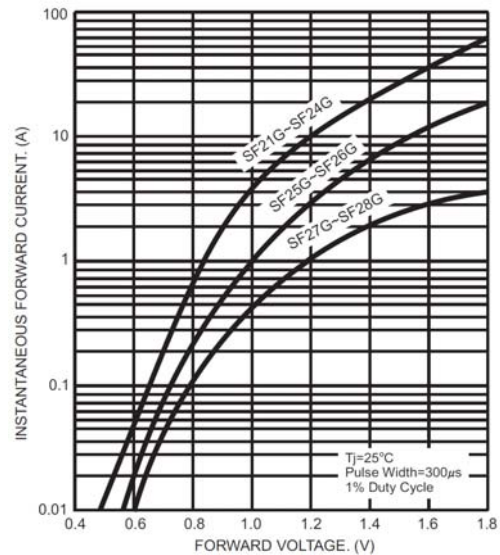


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

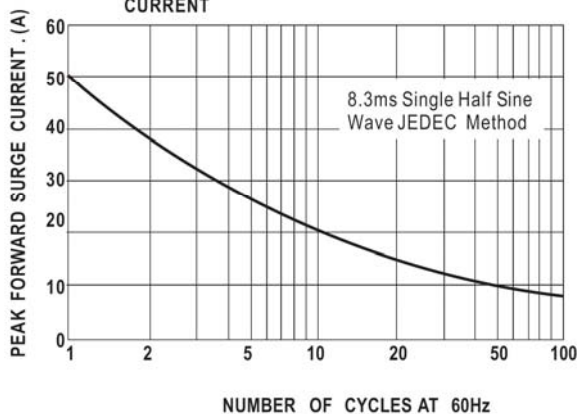


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

